


Model 86 A/A

THE BIG BENCH AIR OPERATED FOIL STAMPING MACHINE

FOIL-STAMP • DEBOSS • LEATHER • PLASTICS • WOOD • VINYL • PAPER • RIBBONS

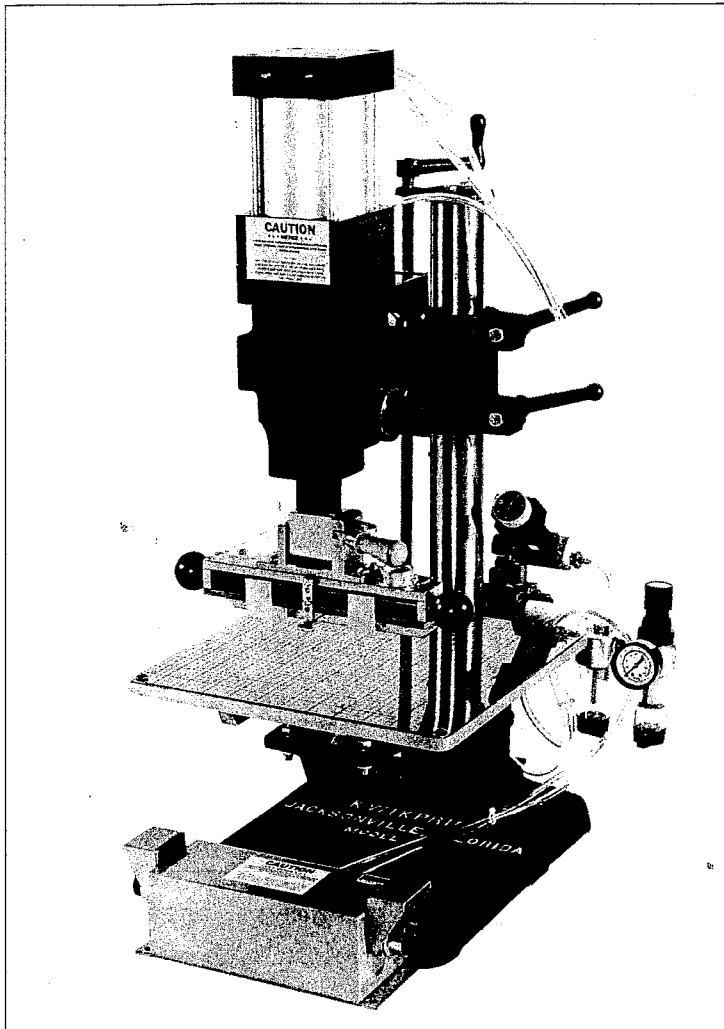

Standard Equipment

- Automatic Heat Control
- 12 x 12 Lined Platform
- Hand Control Unit

Tiltable Typeholders Options

(Multiline Feature Additional)

- #7 - 1" x 5³/₄"
- #80 - 2" x 5³/₄"
- #79 - 1" x 9"
- #809 - 2" x 9"
- #305 - 3" x 5³/₄"

Optional Accessories

- Air Counter
- Workholders
- Automatic Roll Feed
- Multi-Stage Cylinder for 1-Ton Pressure
- Two-way Adjustable Platform
- Precision Linefinder
- Machine Light
- Right Angle Platform Gauges
- Pencil Attachment
- Match Attachment
- Custom Fixtures Available

ADDITIONAL FEATURES AND BENEFITS

The Kwikprint MODEL 86 A/A (Air/Automatic) is also easy to use and extremely versatile. This model has all of the features and benefits of the Model 86 plus the special addition of our semi-automatic air cylinder system. The MODEL 86 A/A is a must for heavy production demands. This system provides the operator with increased speed and accuracy and eliminates manual fatigue and misprints. Pressure and dwell are automatically controlled by the air unit to provide a perfect imprint every time. The OSHA approved safety hand control unit activates the machine with the touch of both hands on either side of the control. The MODEL 86 A/A is an excellent choice for high volume imprinting of individual names, monograms, corporate logos and multiple line imprinting in gold, silver or any pigment color. This machine is capable of printing on leather and vinyl binders, document folders, stationery, napkins, cards, plastic badges, acetate, albums, bibles, wallets, pencils, award ribbons and much more. The MODEL 86 A/A has all of the same features listed with the MODEL 86 (previous page) to include the following: Semi-automatic air control cylinder system; Adjustable air pressure gauge; Adjustable dwell timer control; OSHA safety hand control unit; 1/4" NPT universal air fittings. These features combined with the industrial durability of a Kwikprint have provided our customers with decades of profit making service. No other machine in its class or near its class can compare with the Kwikprint's strength, versatility and ease of operation.

SPECIFICATIONS: Typeholder will take either a 5³/₄" or 9" line of type. Width depends on the typeholder selected with the machine. Top platform has 12" x 12" lineboard with 1/4" precision dimensions for easy centering. Lower platform is 3³/₄" x 7". Throat depth is a full 9". Base casting is 11¹/₂" wide x 17¹/₂" deep. Machine height is 38". Adjustable head provides 6" of extreme clearance from the type to the platform. Weight is approximately 130 lbs. / 145 lbs. crated. **SUGGESTED COMPRESSOR REQUIREMENTS:** Minimum of 1.5Hp - Minimum line pressure of 100 lbs. (normal operating pressure is 80 lbs.) - 1.5 CFM Output.

NOTICE: THE MACHINE IS EQUIPPED WITH AN OSHA APPROVED HAND CONTROL UNIT IN ACCORDANCE WITH OSHA REGULATIONS. THE USE OF FOOT SWITCHES ON THIS MACHINERY LACKING EFFECTIVE POINT OF OPERATION SAFEGUARDS "ARE NOT" IN COMPLIANCE WITH OSHA STANDARDS AND MAY CAUSE SERIOUS INJURY TO THE OPERATORS.